


# Maintenance Guide 2011/12

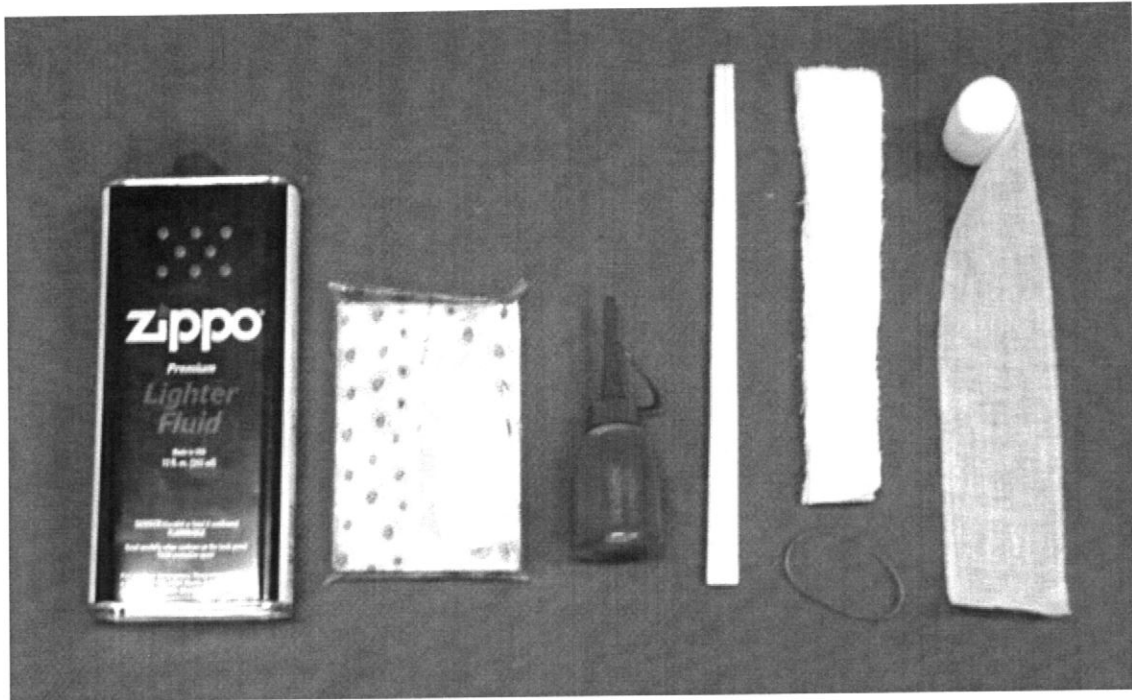

## For rail cleaning

1. Tissue paper
2. Lighter fluid or kerosene (Benzine: for cleaning purpose)

\*\*\*

## For clamp post lubrication and rust prevention


3. Disposable chopsticks
4. Old towel, bandage, or cloth
5. Rubber band
6. Sewing machine oil or grease (Lubricating oil: for movement and rust proofing purpose)

\* As the use purpose of the benzine (2) and the lubrication oil (6) are different from each other, wrong usage may cause breakdown.


Toyo Zouki Co., Ltd. +81-48-478-7128 info@toyo.jp

## Cleaning the Rail (Daily)


Fold the tissue paper and drip the lighter fluid.

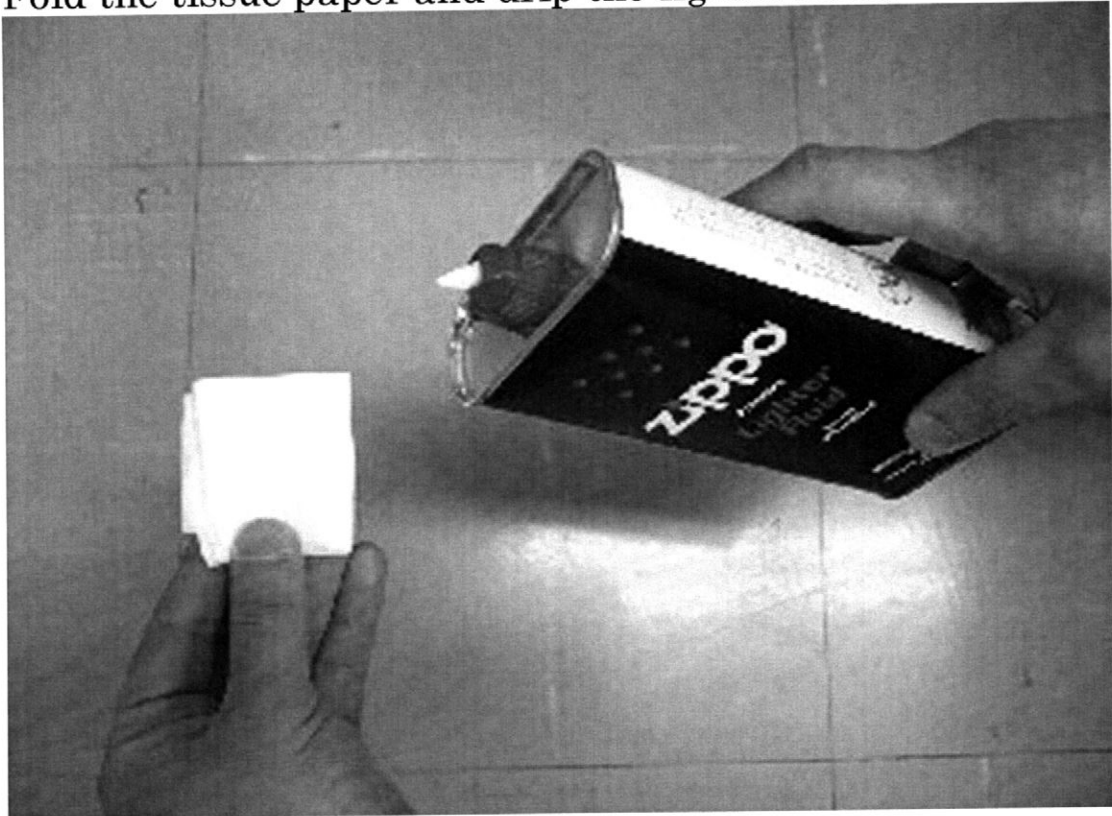


Wipe the surface of the rail every day. (Do not wipe the painted surface)

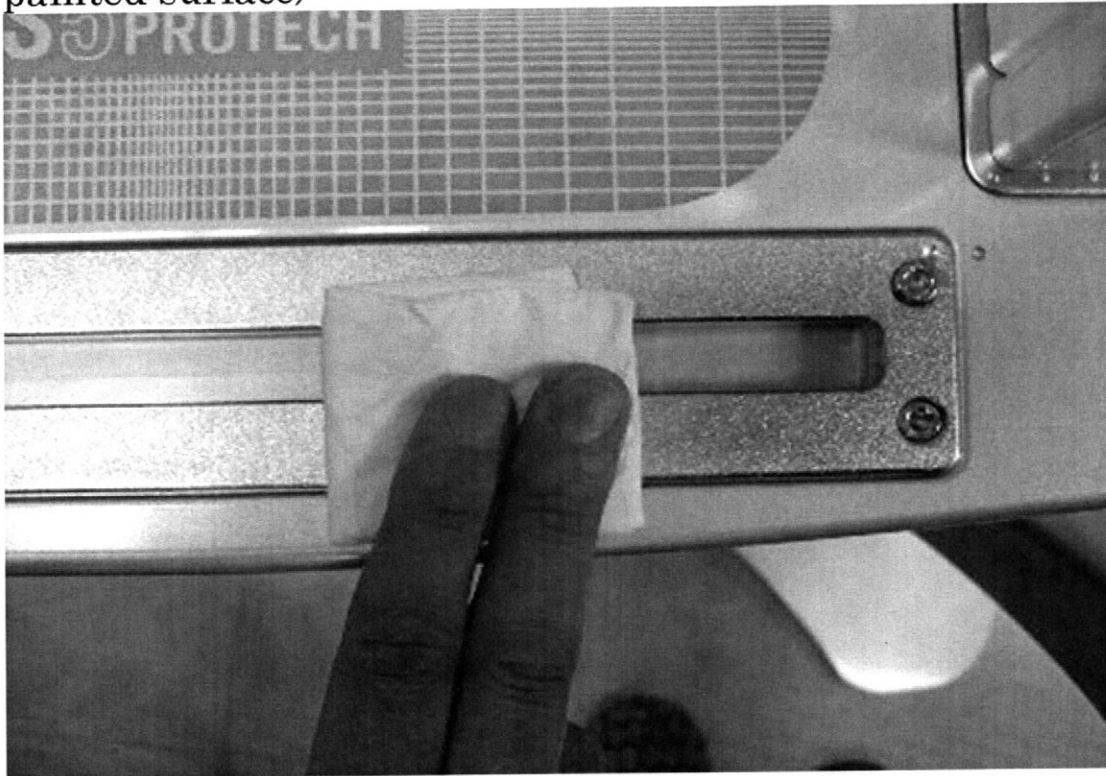

Wipe also the inner side. (Do not wipe the painted surface)

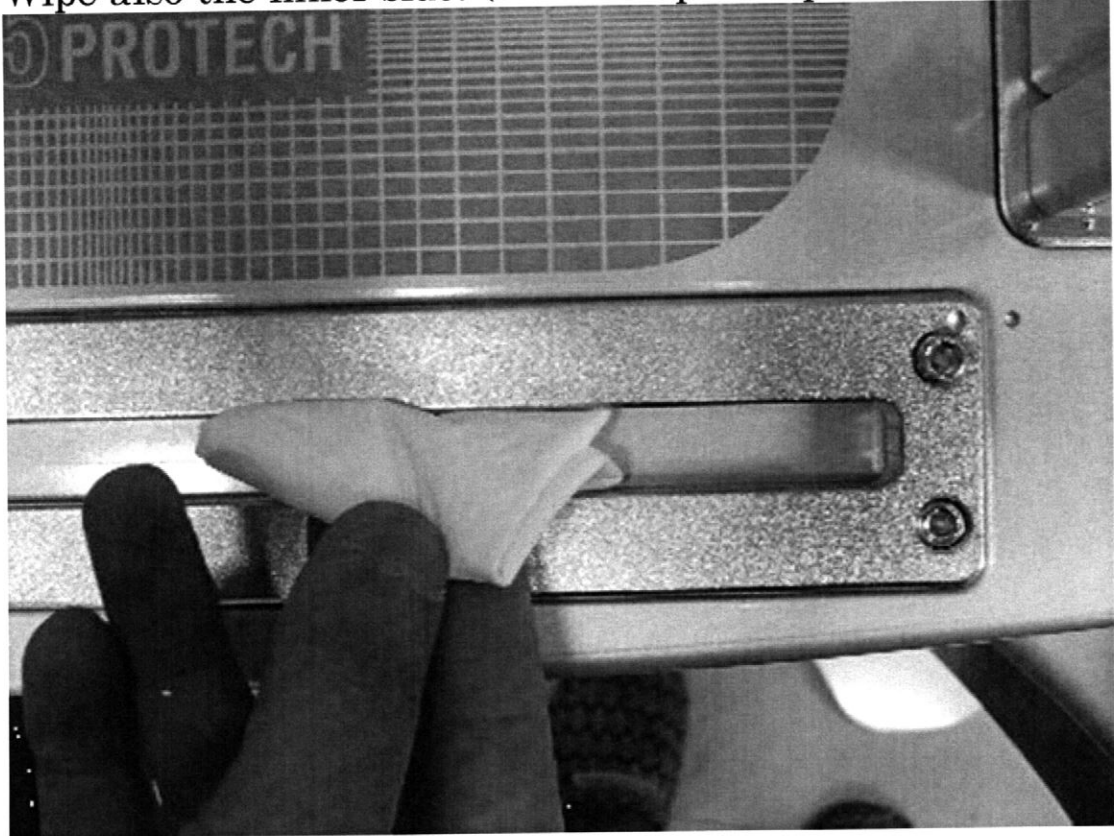


Remove the bolts and wipe the back side once a week.

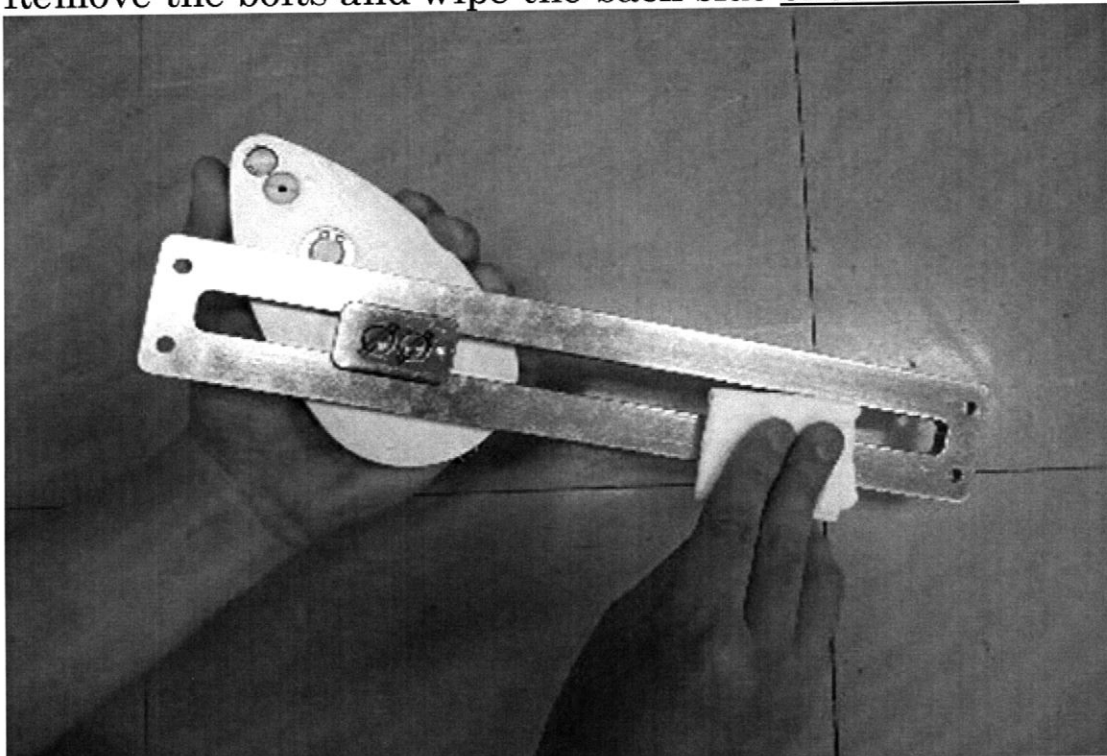


(When reassembling, fasten the bolt tightly)

## Cleaning the Clamp Post (Monthly ~ Yearly)

Cut the bandage or the old towel and wrap it to the chopstick as shown in the figure.

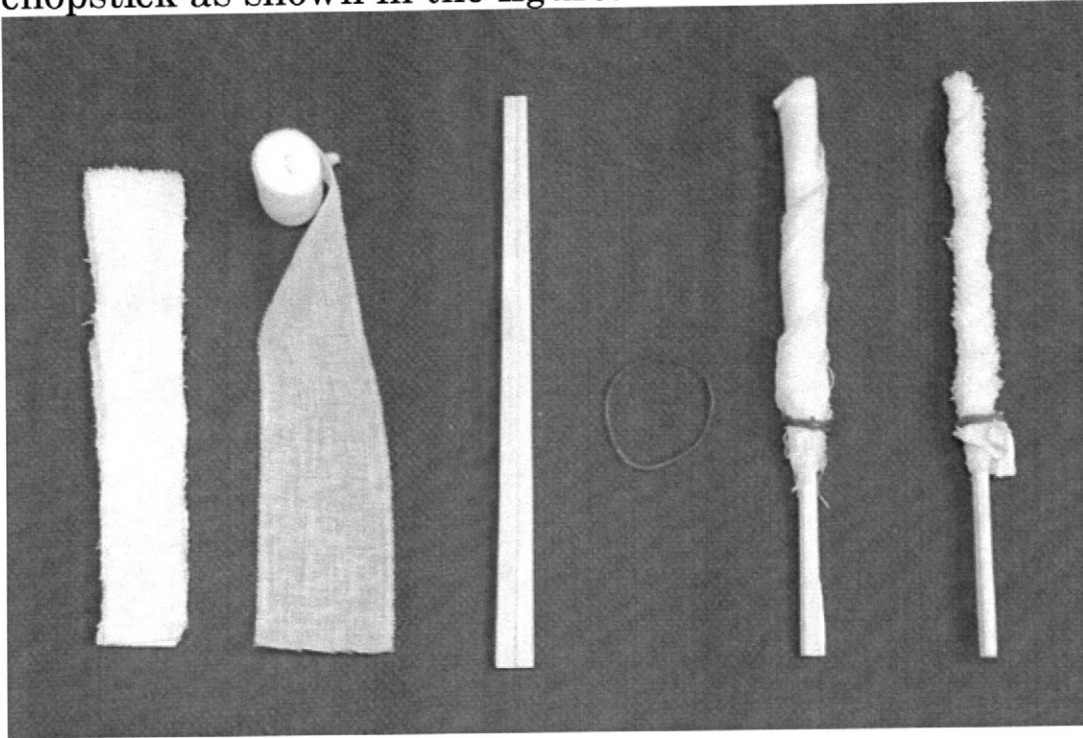

Spread the grease or the sewing machine oil (lubricating oil) and level it.

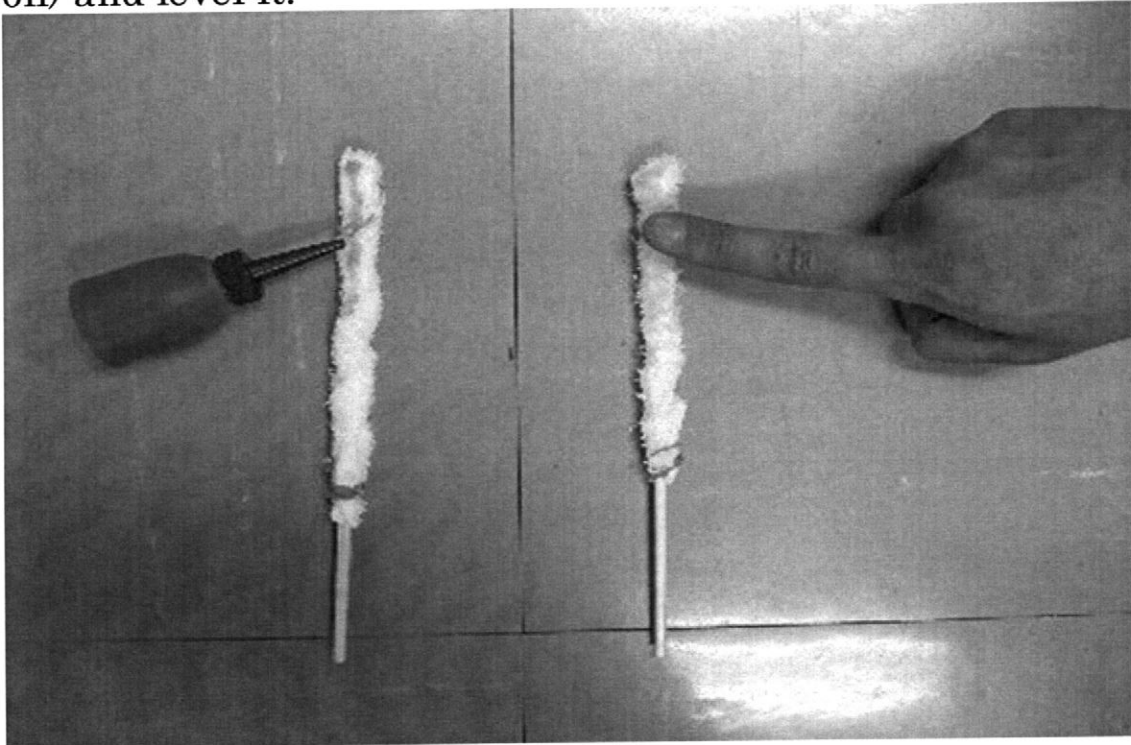


Brush the inner side of the clamp post every month. (Do not over spread)



For rust proofing, apply the grease or the sewing machine oil (lubricating oil) to the cloth, and brush only the upper part of the black string chuck.

Maintenance is unnecessary for the silver string chuck.



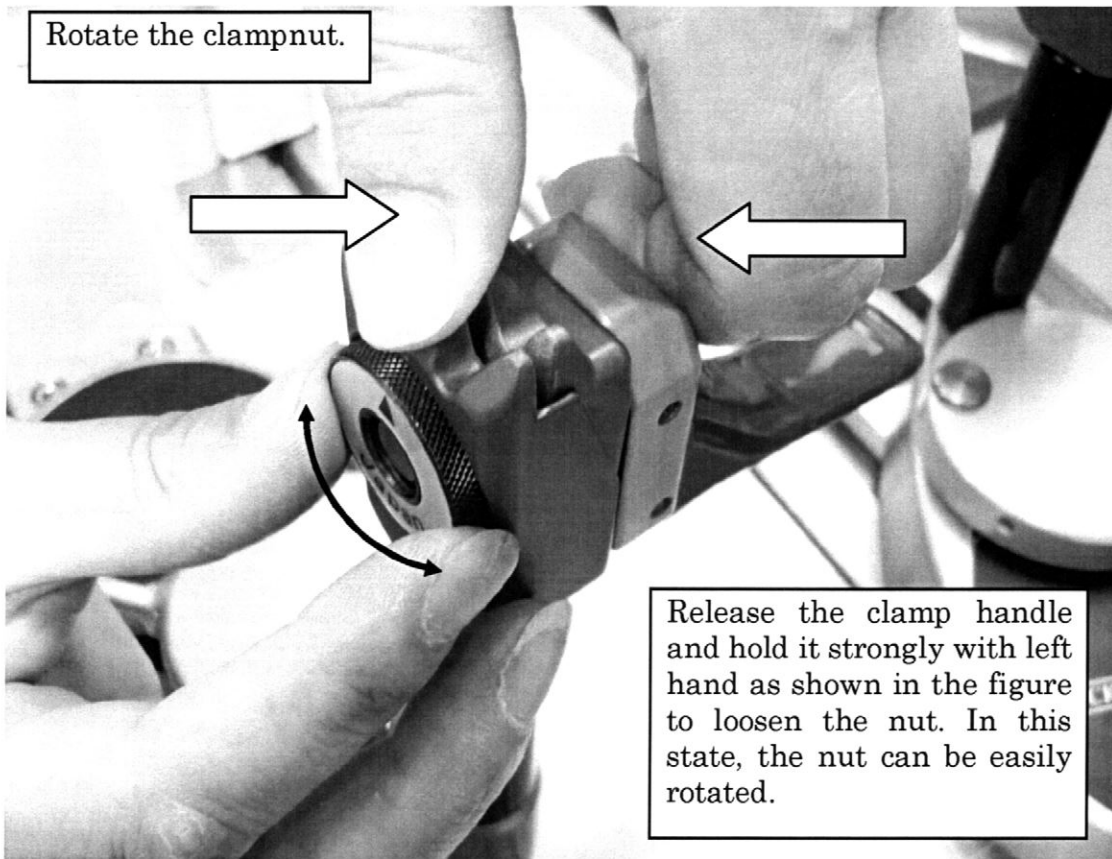

## Check

